


post top- / side entry luminaire ALFONS I FF LED

CE | Ⓢ | EN 60598-2-3 | IP 66 | IK 10 | 220V – 240V / 50Hz – 60Hz

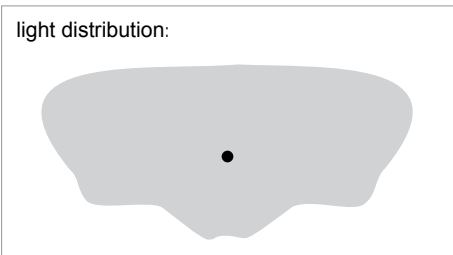

- recom. pole height: 4.00m – 7.00m
- light standards: low and medium lighting requirements
- lamp: incl. 1 or 2 FF II-X LED module(s), easy to replace; generation 3
- colour temperature: 3.000K warm white or 4.000K neutral white
- LED gear: electronic driver, up to 100.000 hours; driver with integrated Constant Light Output (CLO) in order to keep the luminous flux at the same level over the entire life time
- LED life expectancy: up to 100.000 hours, 50.000 hours/ L100 for minimum maintenance costs due to an excellent thermal management
- light control: at extra cost: power reduction, dimming or CLEVER LIGHT
- optical system: directed light (multi layer) provided by an exchangeable, anti-aging lens technology
- light distribution: asymmetrical wide beam
- luminaire head: die cast aluminium, powder coated
- colour: DB 703; other colours on request
- glazing: flat, clear toughened glass glazing
- wiring: completely wired; via a plug and socket connector within the luminaire head; luminaire head to be hinged upward
- installation: for top or side entry; ASA 60 or ASA 76 to be ordered separately:
 - ASA 60 for side entry \varnothing 48mm up to 60mm (0°, -5°, -10°, -15°) or for top entry \varnothing 60mm (0°, 5°, 10°, 15°)
 - ASA 76 for top entry \varnothing 76mm (0°, 5°, 10°)
- accessory: adapter ASA, column, pole accessories, wall bracket, cable – to be ordered separately
- application areas: parks, boulevards, schools, home for elderly people, hotels, factory premises, residential and local distribution roads, main streets, car parks, pedestrian and cycle lanes, holiday parks

lamp	kg	product code
FF LED II-X 14W/2.100lm/4.000K	6,8	9.136.9115.01
FF LED II-X 16W/2.400lm/4.000K	6,8	9.136.9118.01
FF LED II-X 20W/3.000lm/4.000K	6,8	9.136.9124.01
FF LED II-X 27W/3.800lm/4.000K	6,8	9.136.9128.01
FF LED II-X 27W/4.200lm/4.000K ⁽²⁾	7,4	9.136.9215.01
FF LED II-X 32W/4.800lm/4.000K ⁽²⁾	7,4	9.136.9218.01
FF LED II-X 41W/6.000lm/4.000K ⁽²⁾	7,4	9.136.9224.01
FF LED II-X 55W/7.600lm/4.000K ⁽²⁾	7,4	9.136.9228.01
FF LED II-X with 3.000K		x.xxx.xxxx.xx-3
dim settings according to customer's request without pilot-line		x.xxx.xxxx.xx(-x)-93
dim settings according to customer's request with pilot-line		x.xxx.xxxx.xx(-x)-94

necessary accessory: cast aluminum, DB 703

adapter for top entry \varnothing 76mm		
ASA 76	1,0	9.924.0979.70
adapter for top and side entry \varnothing 60mm		
ASA 60	0,9	9.924.0980.70

(2) 2 modules
class II at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 11.2016

