

post top- / side entry luminaire ALFONS II WUFF LED

CE | Ⓢ | EN 60598-2-3 | IP 66 | IK 10 | 220V – 240V / 50Hz – 60Hz




- recom. pole height: 6.00m – 12.00m
- light standards: medium and high lighting requirements
- lamp: incl. 2, 3 or 4 WUFF LED modules, easy to replace
- colour temperature: 4.000K neutral white; 3.000K on request
- LED gear: electronic driver, up to 50.000 hours
- LED life expectancy: > 55.000 hours/ L80/ B10 for minimum maintenance costs due to an excellent thermal management

- optical system: directed light (multi layer) provided by an exchangeable, anti-aging lens technology
- light distribution: asymmetrical wide beam
- luminaire head: die cast aluminium, powder coated
- colour: DB 703
- glazing: flat, clear toughened glass glazing
- wiring: completely wired; via a plug and socket connector within the luminaire head; luminaire head to be hinged upward

- installation: for top or side entry; ASA 60 or ASA 76 to be ordered separately:
 - ASA 60 for side entry \varnothing 48mm up to 60mm (0°, -5°, -10°, -15°) or for top entry \varnothing 60mm (0°, 5°, 10°, 15°)
 - ASA 76 for top entry \varnothing 76mm (0°, 5°, 10°)

- accessory: adapter ASA, cable, column, pole accessories, bracket, – to be ordered separately
- application areas: parks, boulevards, schools, home for elderly people, hotels, factory premises, residential and local distribution roads, main streets, car parks, pedestrian and cycle lanes, holiday parks

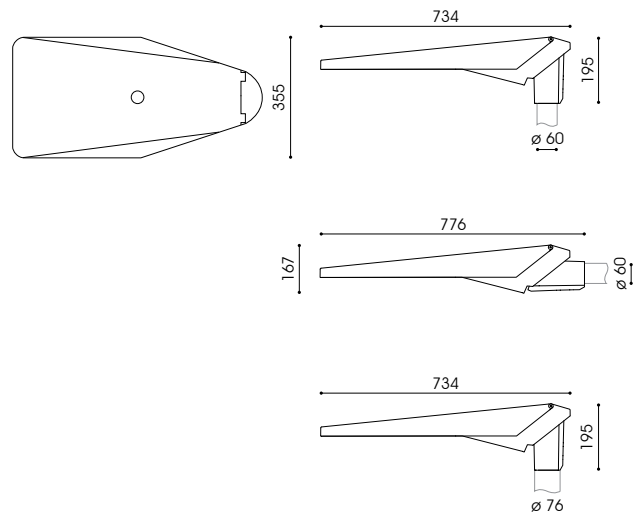

lamp	kg	product code
WUFF LED 68W/7.200lm/4.000K ⁽²⁾	7,4	9.140.9232.01
WUFF LED 102W/10.800lm/4.000K ⁽³⁾	7,7	9.140.9332.01
WUFF LED 136W/14.400lm/4.000K ⁽⁴⁾	7,9	9.140.9432.01

necessary accessory: cast aluminum, DB 703

adapter for top entry \varnothing 76mm ASA 76	1,0	9.924.0979.70
adapter for top and side entry \varnothing 60mm ASA 60	0,9	9.924.0980.70

(2) 2 modules, (3) 3 modules, (4) 4 modules
class II at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 11.2016

